

CFL

U-SHAPE

GB3 products



- ✓ 8000 – 15000 hour lifetime
- ✓ Australia C-tick approved
- ✓ Energy Star / UL approved
- ✓ Available in 2U or 3U style



Model#.	WATT (w)	LUMINOUS FLUX (lm)	COLOUR (K)	BASE	RENDERING INDEX (Ra)	VOLT (V)	CERTIFICATE
GB3UT2U-9	9	550	2700	E26 E27 B22	≥80	110-130V	AUSTRALIA C-tick approved
GB3UT2U-11	11	660				/	
GB3UT3U-15	15	800	6400			/	ENERGY STAR/UL approved
GB3UT3U-18	18	950				220-240V	

CFL

A-SHAPE

GB3 products



- ❖ 6000 – 10000 hour lifetime
- ❖ Energy Star / UL approved
- ❖ Up to 80% energy savings over equivalent incandescent
- ❖ Suitable for commercial and residential energy savings
- ❖ Direct retrofit for incandescent GLS lamps
- ❖ Suitable for indoor use or outdoors in weather proof fitting



Model #.	WATT (w)	LUMINOUS FLUX (lm)	COLOUR (K)	BASE	RENDERING INDEX (Ra)	VOLT (V)	CERTIFICATE
GB3.AS-7	7	300	2700	E26 E27 B22	≥80	110-130V	ENERGY STAR/UL approved
GB3.AS-9	9	400				/	
GB3.AS-11	11	550	6400			220-240V	
GB3.AS-13	13	750					

CFL

GU10 T2

GB3 products



- ❖ 8000 hour lifetime
- ❖ Energy Star / UL approved
- ❖ Up to 80% energy savings over equivalent incandescent
- ❖ Direct retrofit for halogen GU10 lamps
- ❖ For domestic and commercial lighting applications
- ❖ Also available as an LED



Model #.	WATT (w)	LUMINOUS FLUX (lm)	COLOR (K)	BASE	RENDERING INDEX (Ra)	VOLT (V)	CERTIFICATE
GB3GUC-5	7	150	2700 / 6400	GU10	≥80	110-130V	ENERGY STAR/UL approved
GB3GUC-7	9	180				/	
GB3GUC-9	11	250				/	
GB3GUC-11	13	300				220-240V	

CFL

PAR SERIES

GB3 products



❖ Energy Star / UL approved

❖ For commercial lighting applications

❖ LED versions are also available



Model #.	WAT T (w)	LUMINOUS FLUX (lm)	COLOR (K)	BASE	RENDERING INDEX (Ra)	VOLT (V)	CERTIFICATE
GB3PAR38-15	15	800	2700	E26 E27 B22	≥80	110-130V	ENERGY STAR/UL approved
GB3PAR38-18	18	950					
GB3PAR38-20	20	1050	/				
GB3PAR38-23	23	1300	6400				
GB3PAR38-25	25	1400					

CFL

REFLECTOR R30

GB3 products



- ❖ 8000 – 15000 hour lifetime
- ❖ Australia C-tick approved
- ❖ Energy Star / UL approved

❖ Suitable for showcase & retail display usage



Model #.	WAT T (w)	LUMINOUS FLUX (lm)	COLOR (K)	BASE	RENDERING INDEX (Ra)	VOLT (V)	CERTIFICATE
GB3REF-15	15	750	2700	E26 E27 B22	≥80	110-130V	ENERGY STAR/UL approved
GB3REF-18	18	850					
GB3REF-20	20	950	/				
GB3REF-23	23	110	6400			220-240V	

CFL

T2 MINI SPIRAL

GB3 products



- ❖ 8000-15000 hour lifetime
- ❖ < 2.5mg of mercury per bulb
- ❖ Australia C-tick approved
- ❖ Energy Star / UL approved
- ❖ Suitable for commercial and residential energy savings
- ❖ 80% energy savings over equivalent incandescent bulb



Model #.	WATT (w)	LUMINOUS FLUX (lm)	COLOR (K)	BASE	RENDERING INDEX (Ra)	VOLT (V)	CERTIFICATE
GB3T2-9	9	560	2700	E26 E27 B22	≥80	110-130V	AUSTRALIA C-tick approved ENERGY STAR/UL approved
GB3T2-11	11	680					
GB3T2-13	13	800					
GB3T2-14	14	900	/			/	
GB3T2-18	18	1100	6400			220-240V	
GB3T2-20	20	1200					

CFL

T3 MINI SPIRAL

GB3 products



- ❖ 8000-15000 hour lifetime
- ❖ Australia C-tick approved
- ❖ Energy Star / UL approved
- ❖ Fits all common household light fixtures
- ❖ Suitable for commercial and residential energy savings
- ❖ 80% energy savings over equivalent incandescent bulb



Model #.	WATT (w)	LUMINOUS FLUX (lm)	COLOR (K)	BASE	RENDERING INDEX (Ra)	VOLT (V)
GB3T3-9	9	540	2700	E26 E27 B22	≥80	110-130V
GB3T3-11	11	680				
GB3T3-13	13	900				
GB3T3-14	14	900				
GB3T3-18	18	1200				
GB3T3-20	20	1250				
			6400			220-240V

LED

HIGH POWER SPOTLIGHT

GB3 products



- ❖ MR16/GU10 (CREE)
- ❖ FCC approved
- ❖ CE/RoHS approved

❖ Direct retrofit to existing 12V MR16 halogen lamps

- ❖ Interior/exterior down lights
- ❖ Staircase and hallway lighting

❖ Suitable for commercial and retail purposes (display lighting)

❖ Also available as a CFL model



Model #.	BASE	LUMINOUS FLUX (lm)	COLOR (K)	LED (Q'ty)	VOLT (V)	CERTIFICATES
GB3LED1X3W-S1	GU10 GU5.3	120	2700/640 0	1	DC12V (MR16)	FCC/CE/RoHS
GB3LED1X3W-S2		120		1		
GB3LED3X1W		150		3		


LED

PAR SERIES FLOODLIGHT / SPOTLIGHT

GB3 products



High Wattage Diode Version

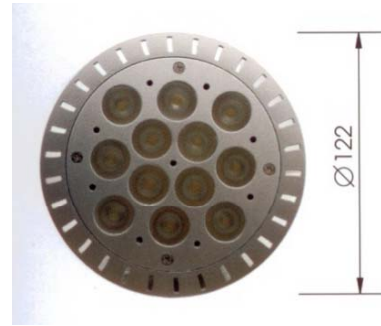

Low Wattage Diode Version

❖ PAR20 and PAR38 are available in floodlight category

❖ FCC approved

❖ CE/RoHS approved

Model #.	BASE	LUMINOUS FLUX (lm)	COLOR (K)	LED (Q'ty)	VOLT (V)
GB3LEDPAR38-45/60/80-L	E26 E27	150 / 200 / 250	2700/6400	45 / 60 / 80	AC 85-255V AC 100-240V
GB3LEDPAR38-12-H		1200		12	

LED

GB3 products



T5 TUBE LIGHT



T8-T5



T5

- ❖ FCC approved
- ❖ CE/RoHS approved
- ❖ Replaces fluorescent tube lights
- ❖ Suitable for commercial and office use



Model #.	WATT (w)	LUMINOUS FLUX (lm)	COLOR (K)	LED (Q'ty)	VOLT (V)	LENGTH (CM)	CERTIFICATES
GB3LEDT5-23	4.2	230	2700/6400	23	AC 90-265V	48.58	CE/RoHS
GB3LEDT5-25	4.5	250		25		51.69	
GB3LEDT5-27	4.9	270		27		54.90	
GB3LEDT5-42	7.5	420		42		84.90	
GB3LEDT5-54	9.0	540		54		114.90	

LED

T8 TUBE LIGHT

GB3 products



- ❖ FCC approved
- ❖ CE/RoHS approved
- ❖ Replaces fluorescent tube lights
- ❖ Suitable for commercial and office use



Model #.	WATT (w)	LUMINOUS FLUX (lm)	COLOR (K)	LED (Q'ty)	VOLT (V)	LENGTH (CM)	CERTIFICATES
GB3LEDT8-300-1	15	1200	2700/6400	300	AC 85-265V DC 12V	120	FCC/CE/RoHS
GB3LEDT8-300-2	15	1200		300		120	
GB3LEDT8-180	8	600		180		60	
GB3LEDT8-360	19	1500		360		150	

LED

T8 TUBE LIGHT

GB3 products



❖ FCC approved

❖ CE/RoHS approved

❖ Ideals for commercial applications requiring low heat flexible lighting



Model #.	Part NO.	WATT (w)	COLOR (K)	LED (Q'ty)	VOLT (V)	LENGTH (CM)	CERTIFICATES
LED STRIP LIGHT	GB3LED STR-1	1	2700/3700 5000/7000	18	DC12V	25	FCC/CE/RoHS